

DEREVE SERIES DF60

SAFETY RELIEF VALVE ATMOSPHERIC DISCHARGE COMPLETE WITH EASING GEAR

Features:

High performance

Soft valve washer for 'bubble tight' seal

Pressure range 0.5 barg to 27.6 barg

1/4" BSP male taper inlet x atmospheric discharge

Also available as **1/4" NPT inlet**

Valve washers to suit air & inert gases


Brass construction with stainless steel springs

Valves can be supplied de-greased for oxygen service.



CAPACITIES - AIR @ 15°C in Std. Litres/sec @ 10% overpressure

| Size | BarG | 0.5 | 2.0 | 5.0 | 8.0 | 9.0 | 11.0 | 13.0 | 15.0 | 17.0 | 21.0 | 25.0 | 27.6 |
|------|-------|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|
| 1/4" | L/sec | 5 | 15 | 36 | 58 | 67 | 84 | 96 | 110 | 124 | 152 | 180 | 198 |

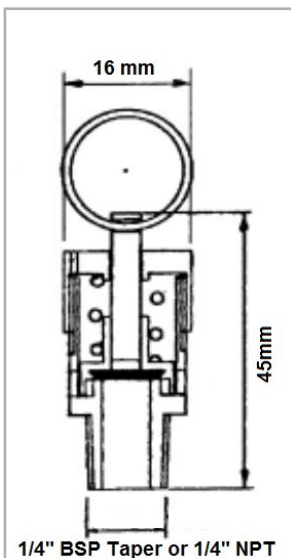

Specification

The series DF60 is a High Lift Safety Relief Valve with atmospheric discharge suitable for air and inert gas applications.

The flow is de-rated and measured in accordance with BS6759 Part 2: 1984

The valve re-seats by minus 10% of set pressure.

Maximum Set Pressure: 27.6 bar

Maximum Temperature: 180°C

ALL SAFETY VALVES ARE PED APPROVED AND MARKED CE 0353



BE™ Bonut Engineering Ltd
T/A DEREVE™ Valves

Unit 12, Latham Close, Bredbury Industrial Park
Stockport, Cheshire, SK6 2SD, United Kingdom
Tel: +44 (0) 161 430 4000 Fax: +44 (0) 161 494 1461
email: sales@bonut.co.uk website: www.bonut.co.uk