

### DEREVE SERIES DF62/63

SAFETY RELIEF VALVE SIDE OUTLET DISCHARGE COMPLETE WITH EASING GEAR



#### Features

High performance  
Soft valve washer for 'bubble tight' seal  
**Pressure range 0.5 barg to 27.6 barg**  
Side outlet discharge

#### Inlet connections BSP taper - outlets parallel


1/4" x 1/2", 3/8" x 1/2", 1/2" x 1/2", 1/2" x 3/4", 3/4" x 3/4", 3/4" x 1"  
or 1" x 1"

Valve washers to suit air & inert gases  
Brass construction with stainless steel springs

Valves can be supplied de-greased for oxygen service & lead wire sealed  
Version DF63 ring pull lifting & available de-greased for oxygen service.

Valve size	1/2" (DN15)	3/4" (DN20)	1" (DN25)
<b>A</b>	15	18	20
<b>B</b>	88	92	99
<b>C</b>	33	33	33
<b>E</b>	40	46	56
<b>F</b>	30.5	36	36

Dimensions in mms

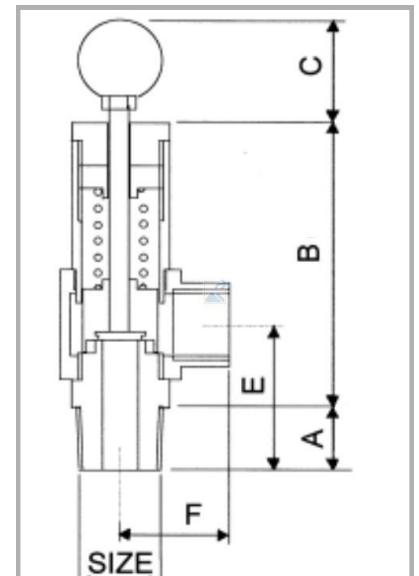

#### Specification

The series DF62/DF63 is a High Lift Safety Relief Valve with side outlet discharge suitable for air and inert gas applications.

The flow is de-rated and measured in accordance with BS6759 Part 2: 1984

The valve re-seats by minus 10% of set pressure.

**Maximum Set Pressure: 27.6 bar**

**Maximum Temperature: 180°C**

**ALL SAFETY VALVES ARE PED APPROVED AND MARKED CE 0353**

#### CAPACITIES - AIR @ 15°C in Std. Litres/sec @ 10% overpressure

Inlet Size	BarG	0.5	2.0	5.0	8.0	9.0	11.0	13.0	15.0	17.0	21.0	25.0	27.6
1/2"	L/sec	10	20	40	60	67	81	94	108	121	148	175	193
3/4"	L/sec	14	29	60	90	100	120	140	161	181	221	261	288
1"	L/sec	23	48	97	146	162	195	227	260	293	358	424	466

**BE™ Bonut Engineering Ltd**  
T/A DEREVE™ Valves

Unit 12, Latham Close, Bredbury Industrial Park  
Stockport, Cheshire, SK6 2SD, United Kingdom  
Tel: +44 (0) 161 430 4000 Fax: +44 (0) 161 494 1461  
email: sales@bonut.co.uk website: www.bonut.co.uk

