

Fig.903 Straight Through Sight Flow Indicators with Integral Spout - Gunmetal

This two sided flow indicator features an integral spout that produces a jetting action for turbulent flow thereby improving the viewing of clear liquids.

Features & Benefits

- The large viewing area allows the flow, colour and condition of the liquid to be observed. This helps monitor product quality and consistency.
- The indicators are suitable for both vertical and horizontal installation. The inclusion of a spout also allows for use as a drip indicator to show valve leaks, distillation or intermittent flow.
- Available with screwed connections. Please refer to end connection options.

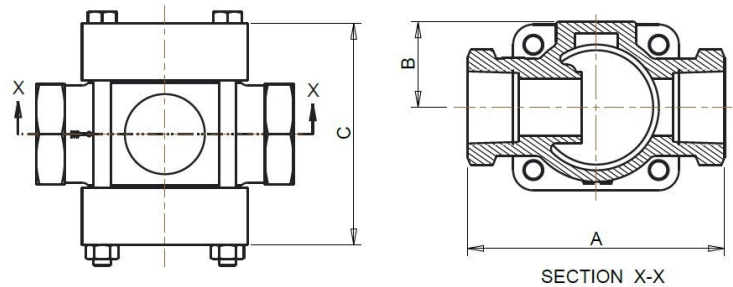


Fig.903 Gunmetal

See page 2 for material construction breakdown

Temperature Ratings

	Temperature
Max Pressure 16 Bar	-9.5°C to 200°C



Dimensions

Screw (mm)	Length A (mm)	Max Height From Centre B (mm)	Max Width C (mm)
15	90	30	78
20	90	30	78
25	110	38	92
40	130	45	103
50	170	56	128



BE® Bonut Engineering Ltd

Unit 12 Latham Close, Bredbury Industrial Park
Stockport, Cheshire, SK6 2SD, United Kingdom
Tel: +44 (0) 161 430 4000 Fax: +44 (0) 161 494 1461
Email: sales@bonut.co.uk Website: www.bonut.co.uk

Rev 1

**DEREVE®
brownall®
RHODES®**

Materials of Construction


Item No.	Description	Body Material	Material	Qty
1	Body	Gunmetal	BS EN 1982 CB491K	1
2	Cover	Mild Steel	BS EN 10025 S355 J2G3	2
3	Glass Disc	Toughened Soda Lime	BS3463 (Standard)	2
		Borosilicate Glass	DIN 7080 (Optional)	
4	Nut	Mild Steel Zinc Plated		4
5	Bolt	Mild Steel Zinc Plated		4
6	Gasket	Nickel Reinforced Graphite (Standard)		4
		PTFE (Optional)		

End Connections

Screwed

- BSP Taper Female 'Rc' BS EN 10226
- BSP Parallel Female 'Rp' BS EN 10226
- BSP Parallel Female 'G' ISO 228
- NPT Female

N.B. Fig 903 is not available with flanged connections

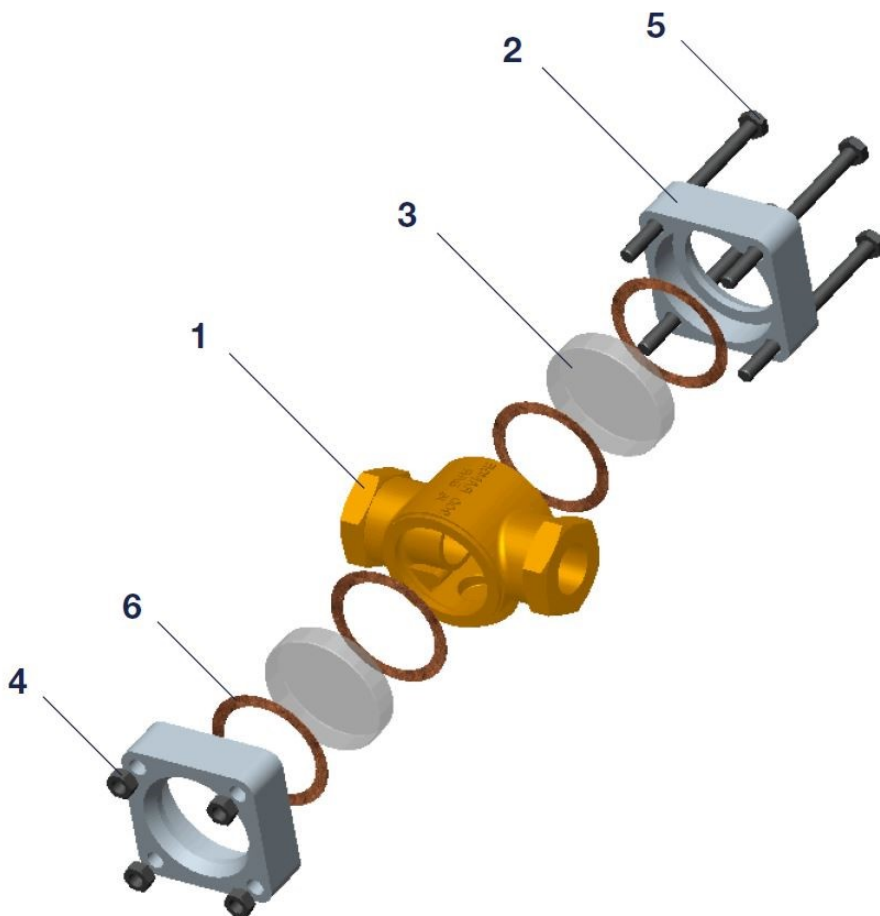

Certificate Number 9027
ISO 9001:2015

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Bonut Engineering assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.



BE® Bonut Engineering Ltd

Unit 12 Latham Close, Bredbury Industrial Park
Stockport, Cheshire, SK6 2SD, United Kingdom

Tel: +44 (0) 161 430 4000
Email: sales@bonut.co.uk

Fax: +44 (0) 161 494 1461
Website: www.bonut.co.uk

**DEREVE®
brownall®
RHODES®**

Rev 1