

Type A Flow Indicator

The Type A enables operators to clearly see what is happening inside a pipe or a process vessel.

Features & Benefits

A simple, robust, straight through sight flow indicator, comprising a good quality cast body which is recessed to hold toughened glass windows on two sides.


The glasses are held in place by steel covers and high tensile fasteners. The gaskets of this unit fit into the same recess as the glass windows and consequently cannot be blown out by excessive pressure. This sight flow indicator is available with a variety of standard flanged end connections and size options range from 25mm to 200mm.

Other options include a choice of materials;

Body: Cast Iron, Carbon Steel or Stainless Steel

Glass: Toughened Soda Lime or Toughened Borosilicate

Gaskets: Nickel Reinforced Graphite or PTFE

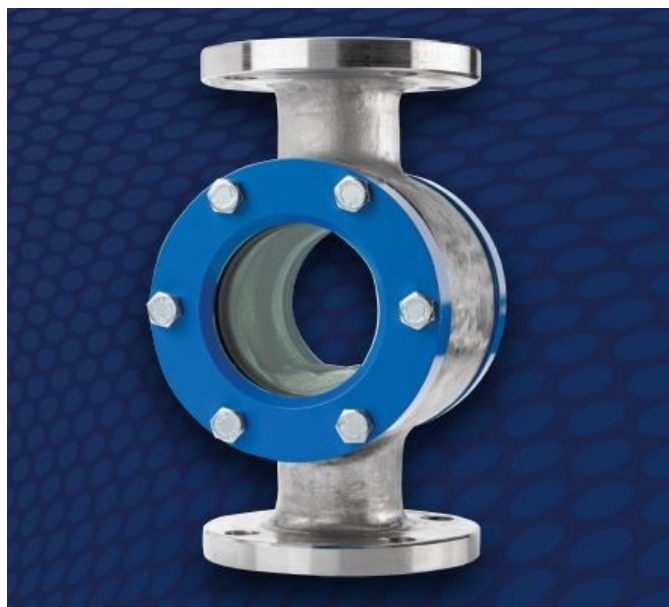

Dimensions

Nominal Bore (mm)	Length (mm)	Weight (kg)	Viewing Dia (mm)	Pressure Rating (Bar)
25	229	9	60	20
40	229	13	70	20
50	279	20	89	20
65	279	22	89	20
80	343	33	120	18
100	425	60	152	16
150	406	60	152	16
200	464	86	210	14

Temperature Ratings

Body	Max Temp	Min Temp
Cast Iron	200°C	-10°C
Carbon Steel	250°C	-20°C
Stainless Steel	250°C	-30°C

End Connections

- ANSI 150RF
- ANSI 150FF
- BS10 Table D,E,F
- BS 4504 PN10, 16, 25



Certificate Number 9027
ISO 9001:2015

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Bonut Engineering assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.



BE® Bonut Engineering Ltd

Unit 12 Latham Close, Bredbury Industrial Park
Stockport, Cheshire, SK6 2SD, United Kingdom
Tel: +44 (0) 161 430 4000 Fax: +44 (0) 161 494 1461
Email: sales@bonut.co.uk Website: www.bonut.co.uk

Rev 1

**DEREVE®
brownall®
RHODES®**