

Fig.904 Straight Through Sight Flow Indicator with Flap and Scale Plate - Gunmetal

The Fig.904 incorporates a pivoted internal flap, which provides indication of change in the rate of flow, from a drip to full flow.

Features & Benefits

- The internal stainless steel flap (5) is electro polished to improve viewing in murky liquids.
- The indicators are suitable for both horizontal and vertical upward flows.
- A variety of glass(3) and gasket(9) materials are available as standard.


See page 2 for material construction breakdown



Fig.904 Gunmetal

Temperature Ratings

| | Temperature |
|------------------------|-----------------|
| Max Pressure 16 Bar | -9.5°C to 200°C |

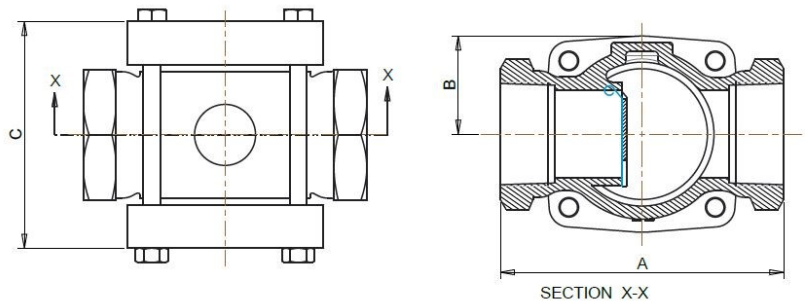

Dimensions

| Screw (mm) | Length A (mm) | Max Height From Centre B (mm) | Max Width C (mm) |
|------------|---------------|-------------------------------|------------------|
| 15 | 90 | 30 | 78 |
| 20 | 90 | 30 | 78 |
| 25 | 110 | 38 | 92 |
| 40 | 130 | 45 | 103 |
| 50 | 170 | 56 | 128 |



Materials of Construction


| Item No. | Description | Body Material | Material | Qty |
|----------|-------------|---------------------------------------|-----------------------|-----|
| 1 | Body | Gunmetal | BS EN 1982 CC491K | 1 |
| 2 | Cover | Mild Steel | BS EN 10025 S355 J2G3 | 2 |
| 3 | Glass Disc | Toughened Soda Lime | BS3463 (Standard) | 2 |
| | | Borosilicate Glass | DIN 7080 (Optional) | |
| 4 | Spirol Pin | Spring Steel | | 2 |
| 5 | Flap | Stainless Steel | | 1 |
| 6 | Scale Plate | Aluminium | | 1 |
| 7 | Nut | Mild Steel Zinc Plated | | 4 |
| 8 | Bolt | Mild Steel Zinc Plated | | 4 |
| 9 | Gasket | Nickel Reinforced Graphite (Standard) | | 4 |
| | | PTFE (Optional) | | |

End Connections

Screwed

- BSP Taper Female 'Rc' BS EN 10226
- BSP Parallel Female 'Rp' BS EN 10226
- BSP Parallel Female 'G' ISO 228
- NPT Female

N.B. Fig 904 is not available with flanged connections

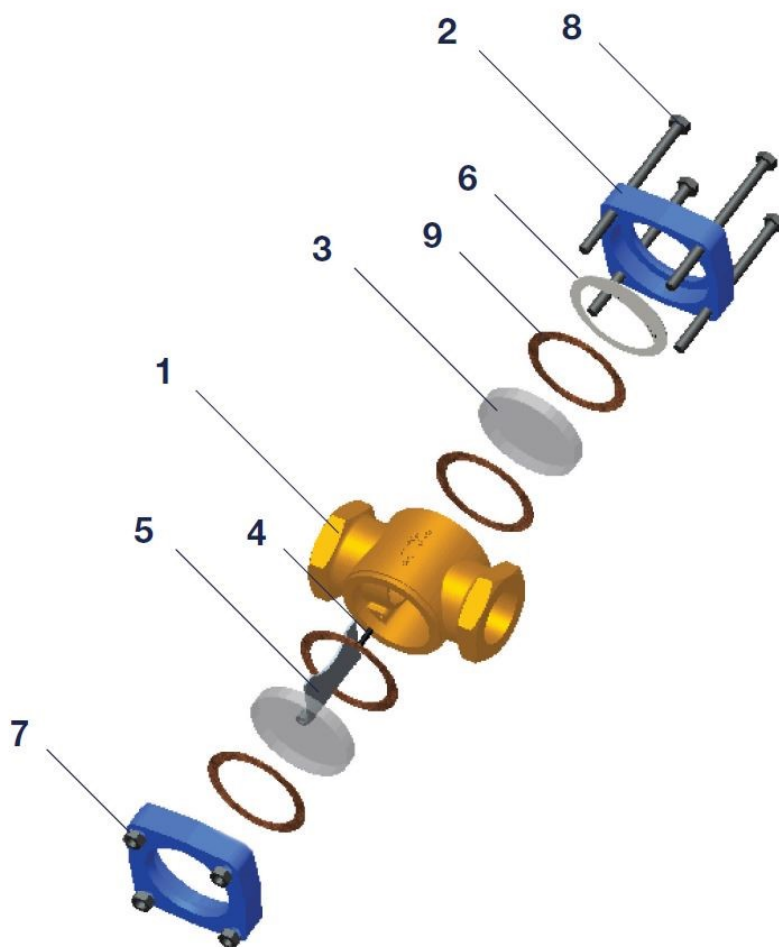

Certificate Number 9027
ISO 9001
ISO 14001

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Bonut Engineering assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.



BE® Bonut Engineering Ltd

Unit 12 Latham Close, Bredbury Industrial Park
Stockport, Cheshire, SK6 2SD, United Kingdom

Tel: +44 (0) 161 430 4000
Email: sales@bonut.co.uk

Fax: +44 (0) 161 494 1461
Website: www.bonut.co.uk

**DEREVE®
brownall®
RHODES®**

Rev 1